







The Patent Office Concept House Cardiff Road Newport

NP10 8000 18 MAY 2004

WIPO PCT

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

BEST AVAILABLE COPY

Patents Act 1977 (Rule 16) THE PATENT OFFICE
PE

2 8 MAR 2003

RECEIVED BY FAX



The Patent Office

Newport
South Wales
NP10 8QQ

Request for grant of a patent
(See the notes on the back of this form. You can also get an
explanatory leader from the Patent Office to help you fill in

this form) NP10 8QQ 1. Your reference PA/GH03 2. Patent application number 0307202.2 (The Patent Office will fill in this part) HANDLEY KUESTER LIMITED 3. Full name, address and postcode of the or of HANDLEY HOUSE, each applicant (underline all surnames) SAINT THOMAS STREET, DEDDINGTON, BANBURY, OXFORDSHIRE OX15 OSY Patents ADP mimber (if you know it) **ENGLAND** If the applicant is a corporate body, give the 8203325002 country/state of its incorporation 4. Title of the invention HIGH-CHAIRS Name of your agent (if you have one) GRAHAM P COLES

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

GRAHAM COLES & CO 24 SEELEYS ROAD BEACONSFIELD BUCKINGHAMSHIRE HP9 1SZ 4361556001

Patents ADP number (If you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know #)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing (day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer Yes' 15:

YES

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- e) any named applicant is a corporate body. See note (d)

Patents Form 1/7

0064797 28-Mar-03 01-22

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

5

Claim(s)

Abstract

Drawing(s)

4 only 1H

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

> Many other documents (bigase specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date 28-03-03

12. Name and daytime telephone number of person to contact in the United Kingdom

GRAHAM F COLES

01494 677181

After an application for a patent bas been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be probibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application bas been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

- a) If you need belp to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/7

30

1

Righ-Chairs

This invention relates to high-chairs as used for babies and for infants.

According to one aspect of the present invention there is provided a high-chair in which a seat having a back-rest is carried by front and rear leg-supports, wherein the seat, its back and the front leg-support are provided together in one piece.

The seat, its back-rest and the front leg-support may be provided together as a one-piece moulding. The moulding may be a laminate having a core of wood (for example, ply-wood), plastics or a material of honeycomb structure, and faced with a wood veneer or plastics (for example, having a melamine content such as that sold under the Registered Trade Mark FORMICA).

The rear leg-support, which may be provided by a pair of tubular legs, may be pivoted to the one-piece member so that the high-chair can be collapsed with the rear leg-support folded onto the front leg-support.

A high-chair in accordance with the present invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figures 1 and 2 are, respectively, side and front elevations of the high-chair according to the invention; and

Figures 3 and 4 are perspective views of the high-chair of the invention from above and below respectively.

701 031 7002 T2: Ta

5

10

15

20

25

30

35

_ ;•

Referring to Figures 1 to 4, the high-chair involves a one-piece, elongate moulding 1 to which a pair of tubular-steel legs 2 are pivoted for rearwardly-inclined support of the high-chair in its erect condition. The moulding 1 is contoured along its length to define for the erect condition, a substantially-horizontal portion 3 that forms the seat of the chair, a substantially-upright portion 4 curved up from the rear of the portion 2 to form a back-rest to the seat, and a longer portion 5 curved down from the front of the seat-portion 2 to provide a forwardly-inclined front leg-support for the chair. The width of the moulding 1 varies along its length also, narrowing down from the top of the back-rest portion 4 to run into the rear of the seat-portion 3, and then increasing slightly towards the front of the seatportion 3. Substantially the same width is held from the front of the seat-portion 3 down to near the bottom of the leg-support portion 5, where the moulding 1 splays out to form foot projections 6 for floor-contact.

The tubular legs 2, which are interconnected by a crosspiece 7, are mounted on pivots 8 within respective
brackets 9 secured to either side under the seat-portion
3. They are held extended rearwardly so as to maintain
the erect condition of the high-chair, by snap engagement
of a tubular-steel frame 10 with a socket 11 mounted on
the underside of the seat-portion 3. In this respect,
the frame 10 is mounted on pivots 12 between the legs 2,
and the action of engaging the frame 10 with the socket
11 extends the legs 2 rearwardly. Engagement of the
frame 10 with the socket 11 is maintained, so maintaining
the rearward extension of the legs 2 and the erect
condition of the high-chair, by the weight of the chair
and the normal, added downward pressure on it in use,
tending to push the legs 2 rearwardly.

10

· ,

+44-1494-678267

The high-chair can be collapsed simply by withdrawing the frame 10 from engagement with the socket 11. This is achieved by lifting the legs 2 from the floor and pushing them forward to pivot about the brackets 9. In the fully-collapsed condition, the legs 2 are folded forwards onto the underside of the portion 5, and the high-chair can be re-erected from this simply by pulling the legs 2 rearwardly and re-engaging the frame 10 with the socket 11. A basket or other container 13 is hung within the frame 10 and can be removed for the collapsed condition, or while the high-chair is in the erect condition, simply by unhitching or otherwise detaching it from the frame 10.

The brackets 9 used for pivoting the legs 2 to the moulding 1, also serve for the attachment of a steel tube 14 that provide arm-rests to the seat. More particularly, the tube 14 has portions 15 at either end which curve upwardly from the brackets 9 to form the arm-rests either side of the seat-portion 3. The portions 15 at their upper ends, bend round the back of the back-rest portion 4 to be interconnected by a straight portion 16 of the tube 14 that is held to the portion 4 by brackets 17.

25

30

35

A forwardly-extending plastics tray 18 of the high-chair is carried by a U-shape tubular-steel frame 19 which has a pivotal mount 20 at each end for engaging with the tube 14. More particularly, the mounts 20 engage releasably with the tube 14 at the tops of the arm-rest portions 15 respectively, where they bend into the portion 16. In fitting the frame 19 to the chair, it is positioned straddling the front of the back-rest portion 4 with the mounts 20 projecting just beyond it on either side. The frame 19 is then pulled forwards slightly to engage the mounts 20 with the tube 14 where the arm-rest portions 15 bend into the portion 16. Each mount 20 has the form of

an elbow that is open on its inside (see Figure 3) so that it 'cups' onto the tube 14 around the bend, and a manually-releasable catch (not shown) then becomes operative to hold it there. The frame 19, and with it the tray 18, is accordingly in this way firmly secured to the chair, but can be freed when desired, by releasing the catch and pushing the frame 19 slightly rearwards to disengage the mounts 20 from the tube 14.

- The underside of the tray 18 has resilient-plastics sockets 21 to either side for snapping onto the two arms respectively of the tubular frame 19, and a manually-releasable clip 22 for clipping onto it centrally. Furthermore, a slide-mechanism 23 under the tray 18 is operable to allow adjustment of the tray-position, forwards or rearwards, relative to the frame 19; the sockets 21 are free to slide along the arms of the frame 19 as appropriate during the adjustment.
- 20 The frame 19, with our without the tray 18 attached, can be swung up from the horizontal into the vertical plane of the back-rest portion 4. In this respect, frame 19 is pivoted to each mount 20, but is held fast until a sprung pin (not shown) of the mount 20 is released manually.

 25 When the pin is released, the frame 19 is freed for pivotal movement as required, for example, when an infant or baby is to sit in the chair or is to leave it.
- Cushioning of the chair-seat and back-rest portions 3 and
 4 for comfort of the occupant is provided by a cover 24
 which also extends down from the front of the portion 3
 into the portion 5 to lie under the knees of an infant
 occupant. The cover 24 has appropriate apertures 25 and
 26 (Figure 3) where attachment of harness (not shown) to
 the seat portion 3 is to be made for child restraint and
 safety.


The portion 5 has a series of transverse slots 27 spaced from one another at progressively-increasing distances below the seat portion 3. A plate 28 is entered in one or other of the slots 27 to provide a footrest at the appropriate height for the occupant of the chair. The plate 28 engages resiliently with a plastics moulding 29 attached to the underside of the portion 5 behind the slots 21, for its retention in the respective slot 27. Adjustment of height of the footrest is made simply by pulling the plate 28 to release it from the moulding 29 and slot 27, and pushing it into another slot 27 at the appropriate height, to re-engage it with the moulding 23.

5

10

15

The moulding 1 may be a laminate having a core of plywood or material of honeycomb structure, and external skins of wood veneer or a melamine-formaldehyde methanal resin such as that sold under the Registered Trade Mark FORMICA.

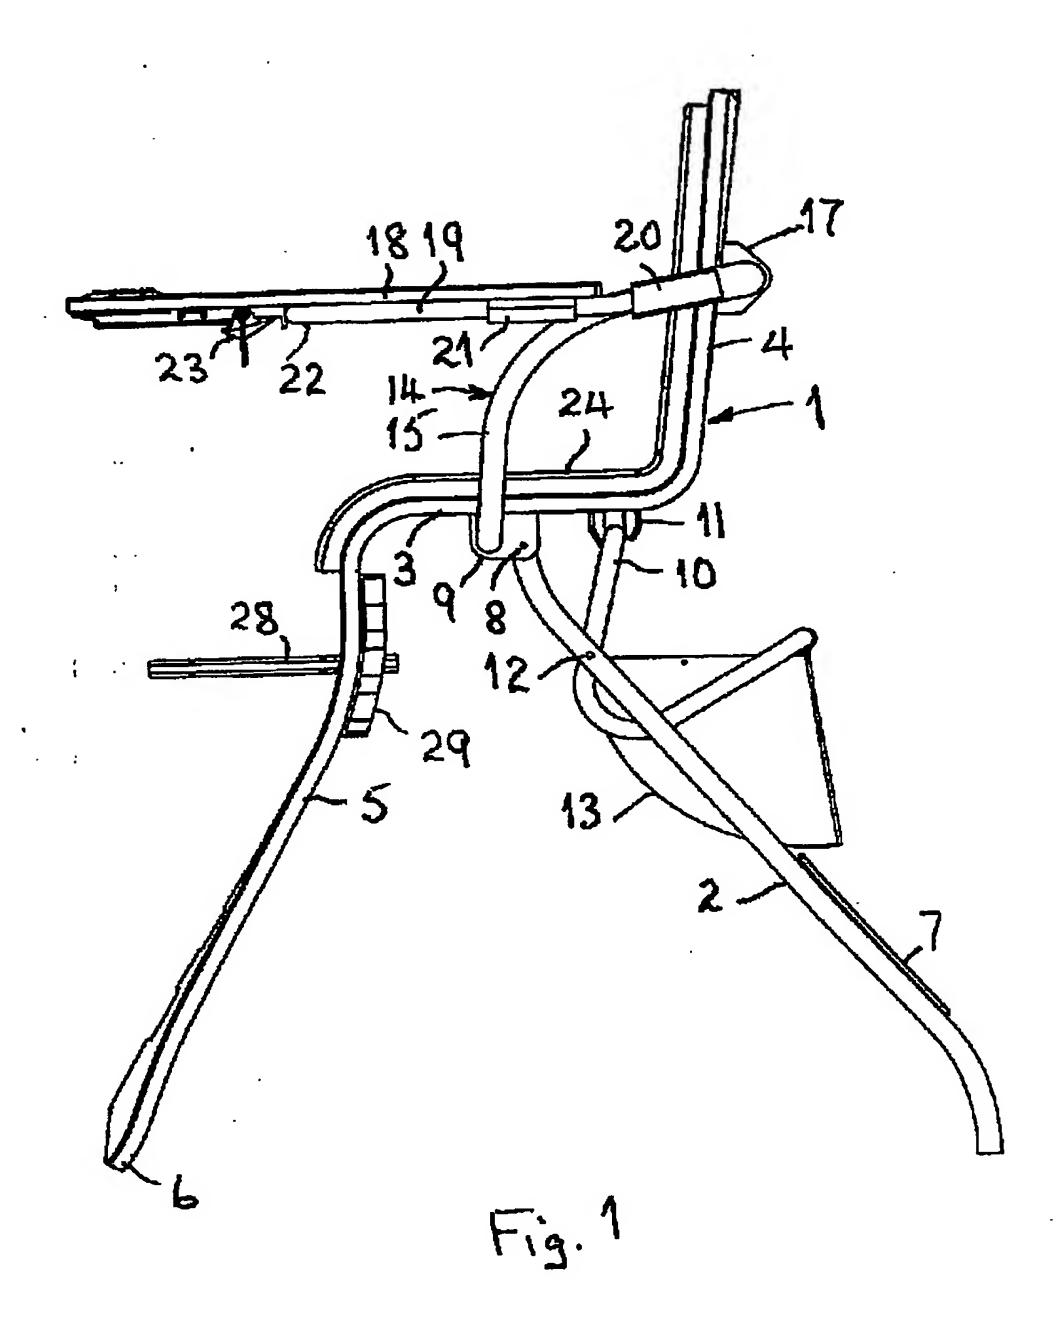

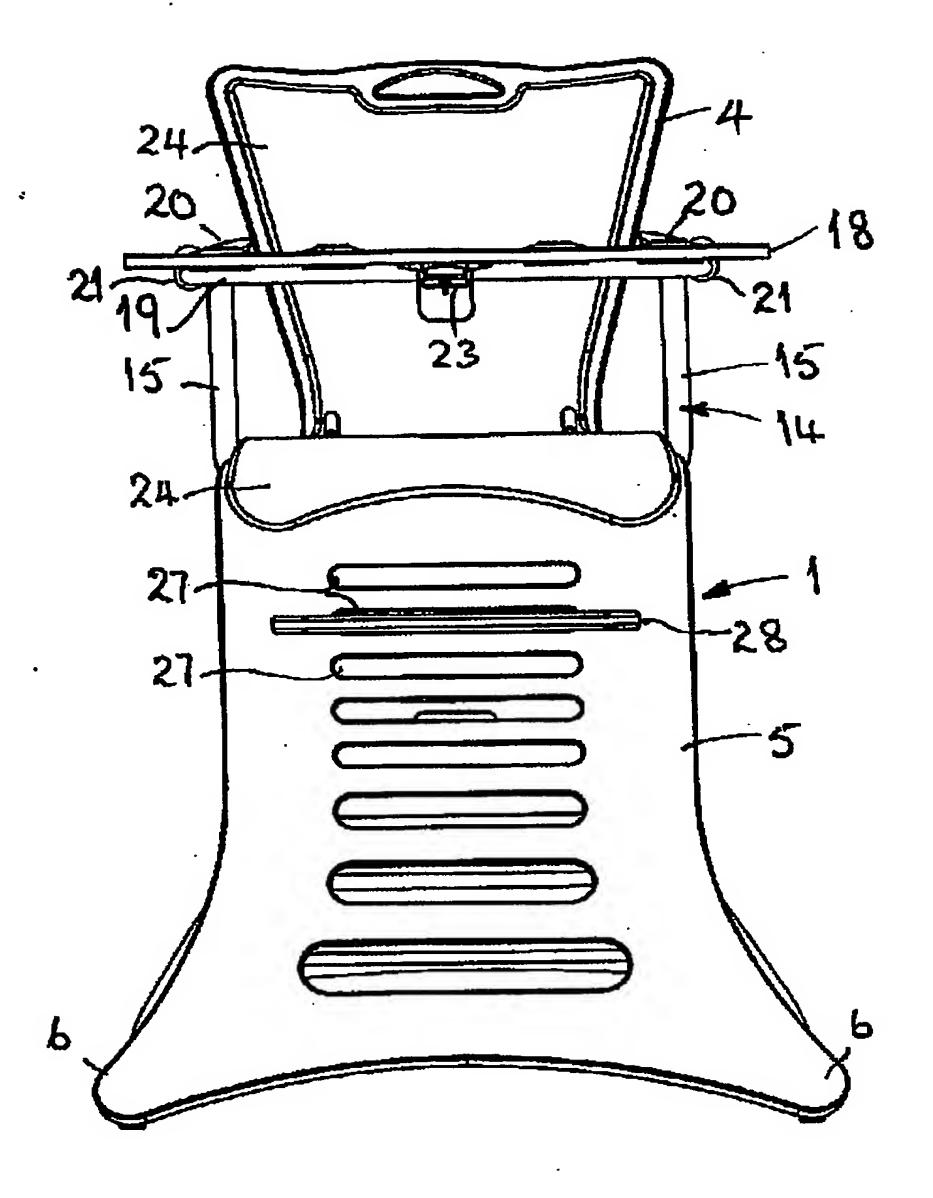
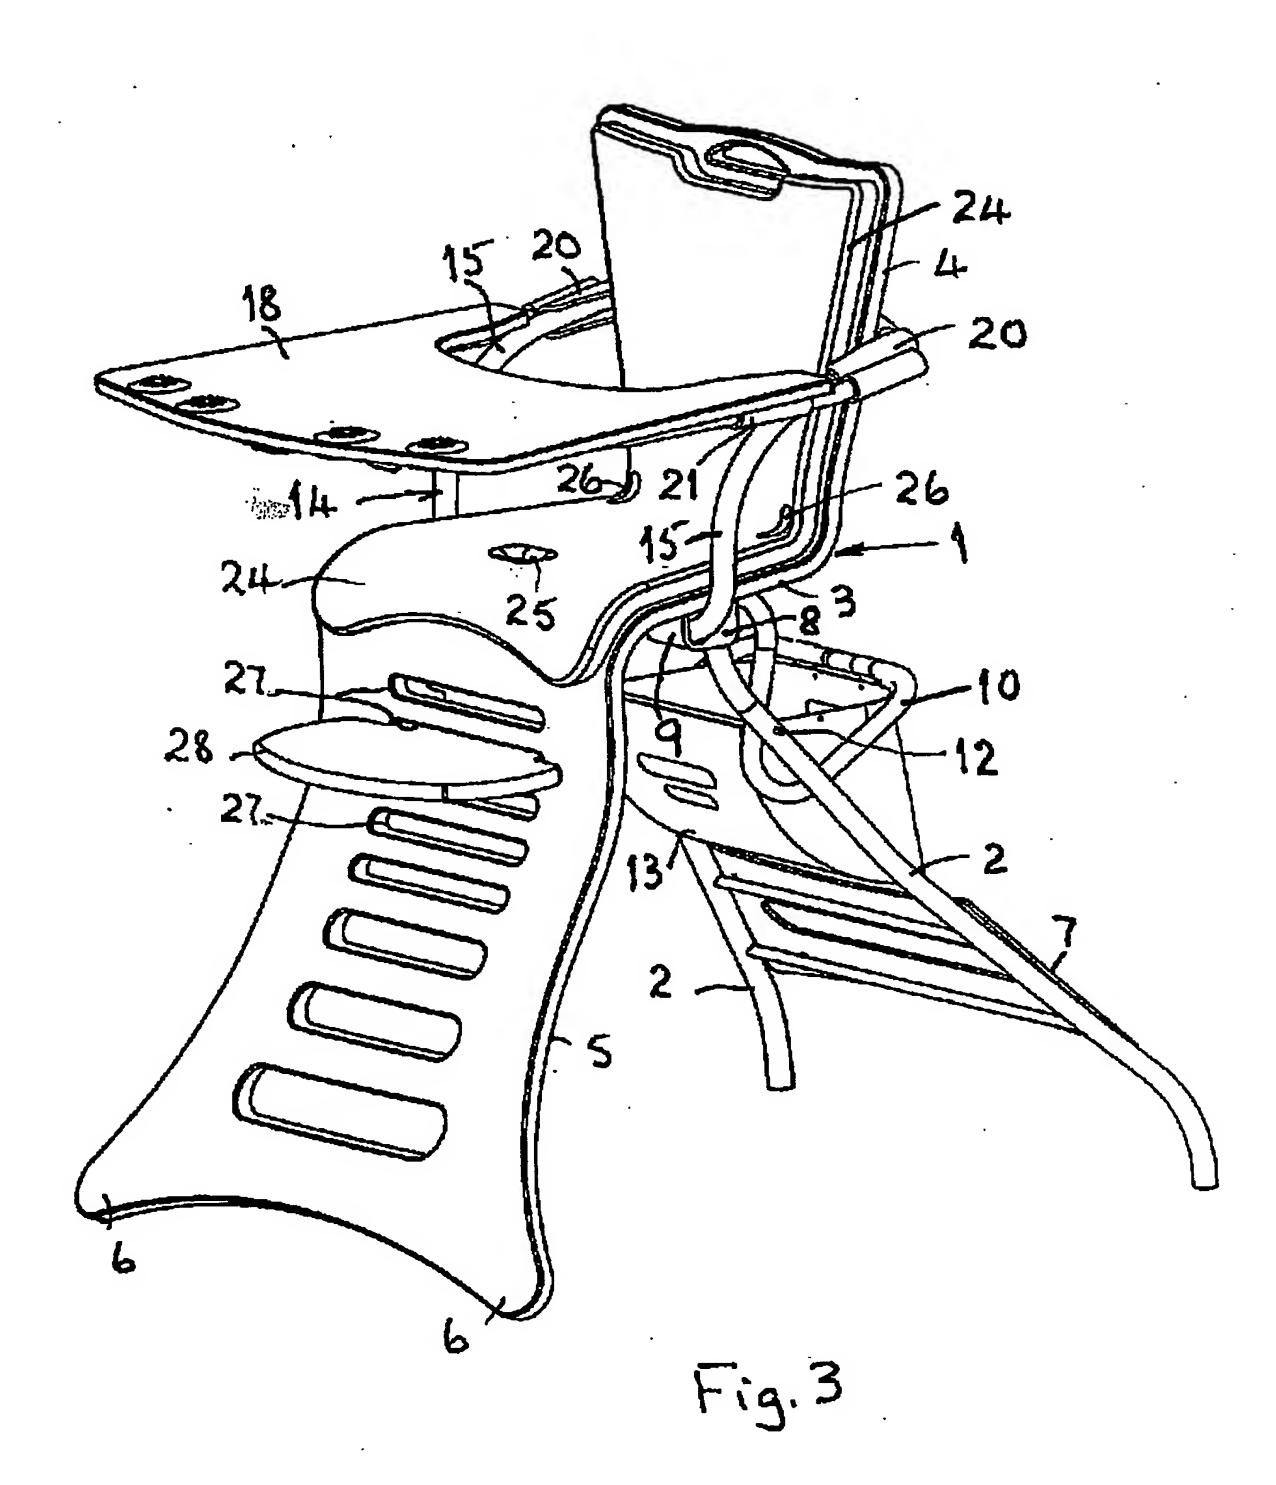


Fig. 2

THE PLOTOR

3 4



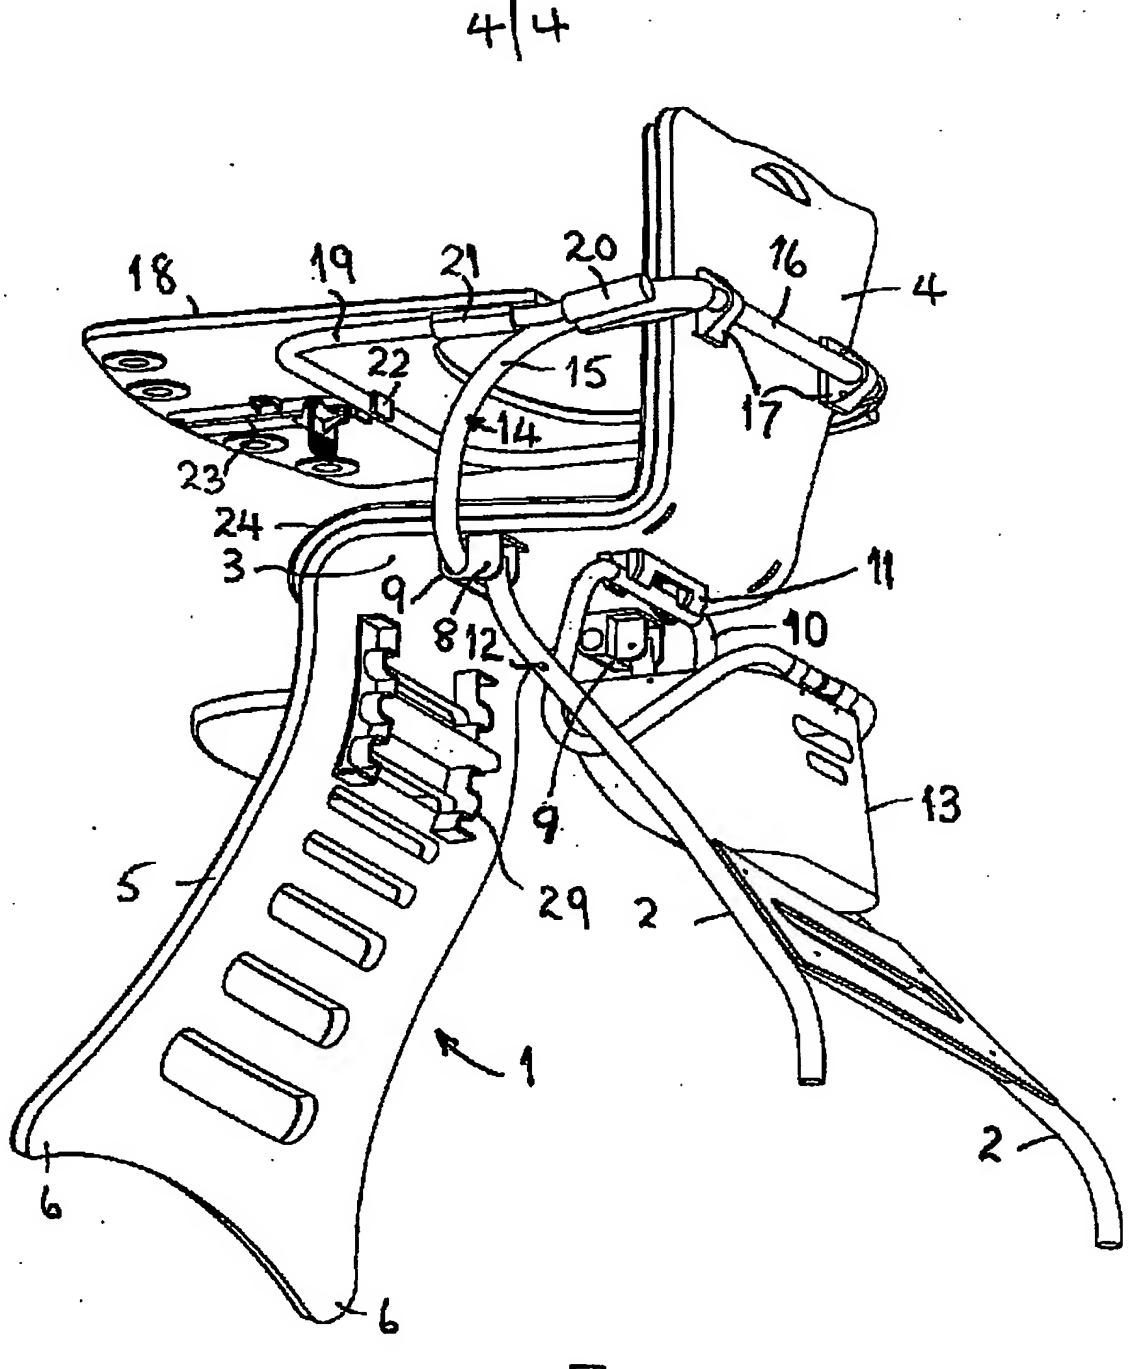


Fig.4

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
☐ FADED TEXT OR DRAWING
☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
OTHER:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.